

Milbank Meter Sockets

Heavy Duty Lever Bypass Condominium Meter Main




U4304-X

- Rated for overhead or underground service
- 200 amps per position
- 5 terminal, 1Ø3W
- Uses standard plug-in breakers
- U/L listed



200 AMP—5 TERMINAL—RINGLESS—LEVER BYPASS
CONDO METER MAIN—1Ø-3 WIRE

CATALOG NUMBER	BYPASS	HUB	CONNECTORS		DIMENSIONS			CONCENTRIC K.O.'S		
			LINE	LOAD	D"	W"	H"	1	2	3
U4302-X-LIS	LEVER	C.P.	3/8"-16 STUD	BRKR	6	27 ³ / ₄	48	4	2	1/4, 1/2
U4303-X-LIS	LEVER	C.P.	3/8"-16 STUD	BRKR	6	27 ³ / ₄	60	4	2	1/4, 1/2
U4304-X-LIS	LEVER	C.P.	3/8"-16 STUD	BRKR	6	45	48	4	2	1/4, 1/2
U4305-X-LIS	LEVER	C.P.	3/8"-16 STUD	BRKR	6	45	60	4	2	1/4, 1/2
U4306-X-LIS	LEVER	C.P.	3/8"-16 STUD	BRKR	6	45	60	4	2	1/4, 1/2

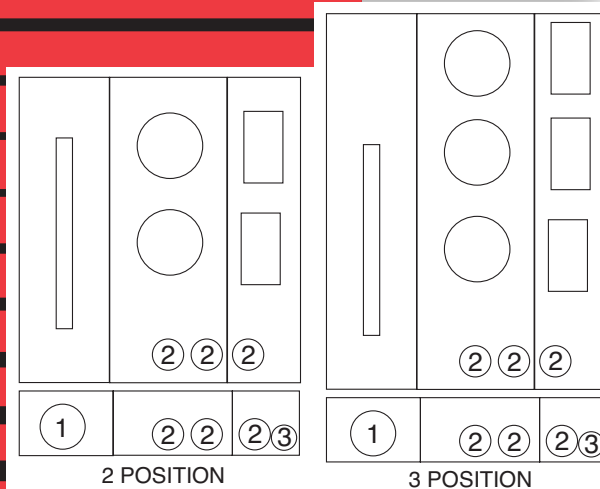

2 POSITION

3 POSITION

HUBS: Units are supplied with 2 closing plates as standard. To order hubs as extra refer to the Hub Suffix chart on the accessory page of the Standard Milbank Catalog or your area Milbank products catalog offered by your Milbank representative.

CONNECTORS: Line wire sections are supplied with 3/8" - 16 hex head nuts with Belleville washers. For single lug connector kits, order as extra: **K1539** (350 kcmil) or **K1540** (600 kcmil). For twin lug connectors: **K1350** (350 kcmil) or **K1541** (600 kcmil.)


LEVER BYPASS: Lever supplies clamping action on meter spades and also operates bypass device.

REPLACEMENT LOCKING PIN: For replacement locking pin order part number **Z816559-SC** (1 pin.)

BREAKERS: Units have provision for (1) double pole main per meter position. Breakers NOT included – order as extra. See chart below.

PLUG-IN BREAKER COMPATIBILITY CHART

AMPS	MILBANK	CUTLER-HAMMER (WESTINGHOUSE)	SIEMENS / ITE	MURRAY / CROUSE-HINDS	G.E.	SQ-D
125-200	—	BR / BJ	—	MD	Q LINE	N/A
≤ 100	—	QUICKLAG P/BR	Q,QP	MP	Q LINE	HOME LINE

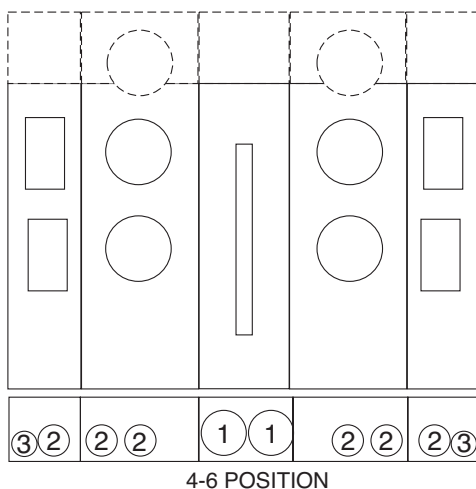

4-6 POSITION





Meter Mounting Equipment

Heavy Duty Lever Bypass Meter / Breaker Combination



U3986-XL-200-LIS

- 200 amp meter socket – 5 terminal, 1Ø3W
- Line side connectors are lay-in style #6-350 kcmil
- 200 amp main circuit breaker
- Available with 100 or 150 amp main circuit breaker
- Hinged, lockable panel door over breaker
- Underground side wireway

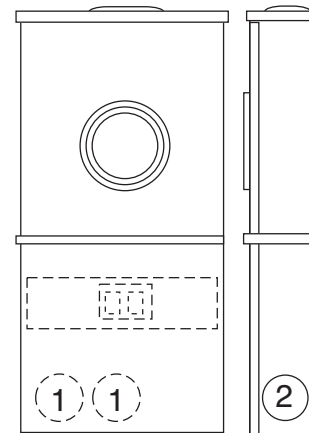

100 / 150 / 200 AMP—5 TERMINAL—WITH MAIN BREAKER—RINGLESS—LEVER BYPASS

AMP	CATALOG NUMBER	HUB	SERV ICE	CONNECTORS CU/AL		BY- PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
100	U3986-XL-100-LIS	C.P.	OH/UG	#6-350 kcmil	1/0-300 kcmil	LEVER	4 ⁷ / ₈	13	34	2 ¹ / ₂	2 ¹ / ₂	3	3	1/4	1/4, 1/2
150	U3986-XL-150-LIS	C.P.	OH/UG	#6-350 kcmil	1/0-300 kcmil	LEVER	4 ⁷ / ₈	13	34	2 ¹ / ₂	2 ¹ / ₂	3	3	1/4	1/4, 1/2
200	U3986-XL-200-LIS	C.P.	OH/UG	#6-350 kcmil	1/0-300 kcmil	LEVER	4 ⁷ / ₈	13	34	2 ¹ / ₂	2 ¹ / ₂	3	3	1/4	1/4, 1/2

HUBS: Unit is supplied with closing plates as standard. 1-1/4" to 2-1/2" hubs available.

LEVER BYPASS: Lever supplies clamping action on meter spades and also operates bypass device.

CONNECTORS: Line wire sections are supplied with #6-350 kcmil lay-in connectors.

BREAKER: Unit has factory installed double pole Milbank **UQFB-100-X1**, **UQFB-150-X1** or **UQFB-200-X1** main breaker.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com



MILBANK[®]