



# Milbank Meter Sockets

## DTE-Specified Sockets

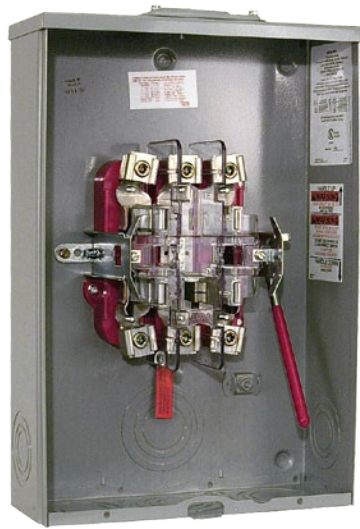

U9551-RXL

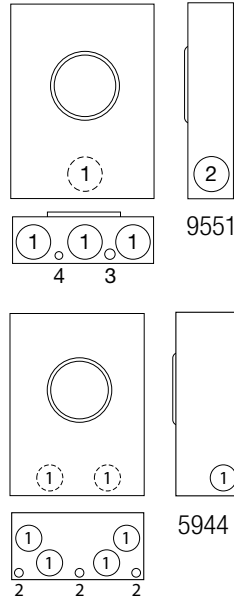

U5944-XT-181

### 200 Amp — 5 Terminal — Lever Bypass — Ringless

Catalog Number	Service	Hub	Bypass	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	
U9551-RXL	OH/UG	C.P.	Lever	#6-350	#6-350	4 <sup>7</sup> / <sub>8</sub>	13	19	3	2 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>	

#### Notes

- **Bypass:** Lever supplies clamping action on meter spades and also operates bypass device.
- **Connectors:** Units supplied with extruded aluminum connectors, a bonded neutral and grounding stud.
- **Fifth Terminal:** Fifth terminal is supplied in the 6 o'clock position. For factory-installed fifth terminal in the 9 o'clock position, add suffix **-5T9** to the catalog number. Fifth terminal can be changed in the field from 6 o'clock to 9 o'clock position.

### 400 Amp — 13 Terminal — With Test Switch Provision — Ringless

Catalog Number	Service	Hub	Connectors CU/AL		Dimensions			Knockouts	
			Line	Load	D"	W"	H"	1	2
U5944-XT-181	OH/UG	(2) C.P.	4-600 or (2) 250	4-600 or (2) 250	12 <sup>1</sup> / <sub>16</sub>	24	34	4	1

#### Notes

- **Hubs:** Two hub openings and plates supplied.
- **Test Switch:** Units are supplied with test switch and prewired per DTE specifications.
- **Front Cover:** Front cover is a "lift off" design.

