



# 320 Amp Ringless Meter Main

## U5059-X-2/200

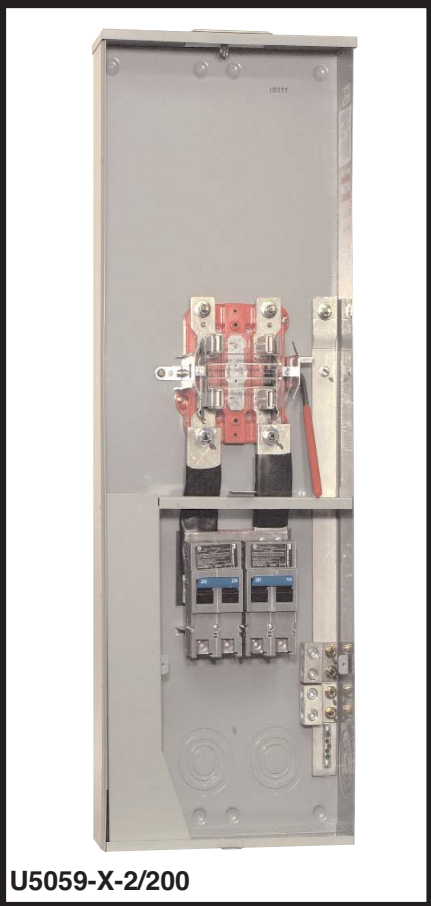

U5059-X-2/200

- 320 amp continuous / 400 amp maximum rating
- Twin 200 amp Milbank UQFP main breakers
- Heavy duty lever bypass jaw-clamping meter socket
- Side wireway for easy overhead or underground installation
- Anti-rotation lugs are available on line side for easier, faster, safer, more reliable installation
- 4-terminal, 1Ø 3W
- Rated 22 KAIC

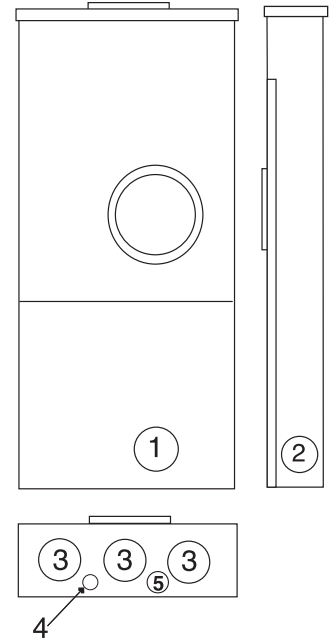

### 320 AMP METER MAIN WITH BREAKERS – 1Ø3W – RINGLESS – 600 VAC

CATALOG NUMBER	SERVICE	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S				
			LINE	LOAD		D"	W"	H"	1	2	3	4	5
U5059-X-2/200	OH/UG	C.P.	3/8-16 STUD	#6-300 kcmil	LEVER	4 <sup>7</sup> / <sub>8</sub>	15	42	3	3	3	1/4	1/4, 1/2
U5059-X-2/200-K3L	OH/UG	C.P.	#4-600 kcmil	#6-300 kcmil	LEVER	4 <sup>7</sup> / <sub>8</sub>	15	42	3	3	3	1/4	1/4, 1/2

**BYPASS:** Lever supplies clamping action on meter spades and also operates bypass device.

**LINE SIDE CONNECTOR KITS FOR U5059-X-2/200 ONLY:** Order anti-rotation connector kit # **K1540L** to accommodate #4-600 kcmil single or **K1350L** for twin 350 kcmil connectors.

**FIFTH TERMINAL:** For field installed fifth terminal, order separately catalog number **K3866**. Available with factory-installed fifth terminal – add suffix **-5T9** for 9:00 position. Can be rotated to 6:00 position.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

5059 10/07 (1K)

