




200 Amp Ringless 3 \emptyset Meter Main

U5750-RXL-200-BL-CECHA

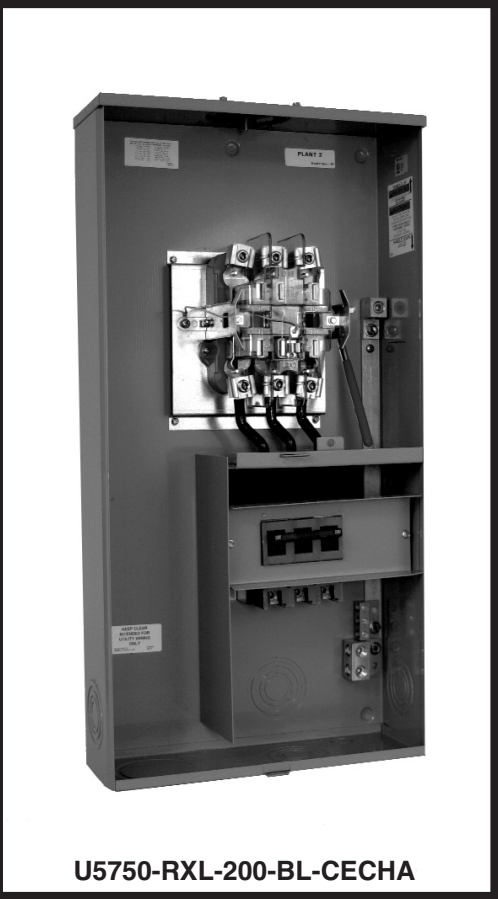

U5750-RXL-200-BL-CECHA

- 200 amp rating
- 200 amp Milbank 3 \emptyset main breaker
- Heavy duty lever bypass jaw-clamping meter socket
- Side wireway for easy overhead or underground installation
- 7-terminal, 3 \emptyset 4W

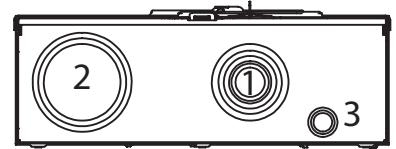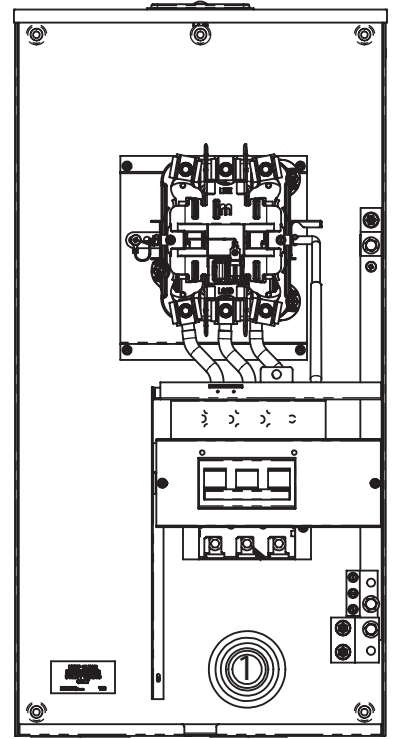

7 TERMINAL – METER MAIN – 3 \emptyset 4W – RINGLESS

CATALOG NUMBER	SERVICE	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S		
			LINE	LOAD		D"	W"	H"	1	2	3
U5750-RLX-200-BL-CECHA	OH/UG	C.P.	#6-350	C/B	LEVER	5 $\frac{3}{4}$	17 $\frac{3}{8}$	34	1 $\frac{1}{4}$ -3	3-4	1 $\frac{1}{2}$ -2

BYPASS: Lever supplies clamping action on meter spades and also operates bypass device.

BREAKER: Factory installed 200 amp, 3-pole, 10,000 AIC.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

5750 07/08 (1K)

