

Combination AC Disconnect/ 20 Amp GFCI Receptacle—

Together in 1 Box!

- Meets NEC® #210.63 Requirements*
- UL Listed as Power Outlet
- Type 3R Enclosure
- In-Use Cover**
- Duplex Ground Connector
- 1" Concentric Knockouts

AC DISCONNECT

- 1 Ø, 240 Volt
- 60 Amp, Non-Fused


GFCI DUPLEX RECEPTACLE

- 20 Amp
- Reset/Test Button

* NEC® #210.63 Heating, Air-Conditioning and Refrigeration Equipment Outlet.

...The receptacle shall be located on the same level and within 7.5 m (25 ft.) of the heating, air-conditioning and refrigeration equipment.

* NEC® #210.08 Ground-Fault Circuit-Interruptor protection for personnel.

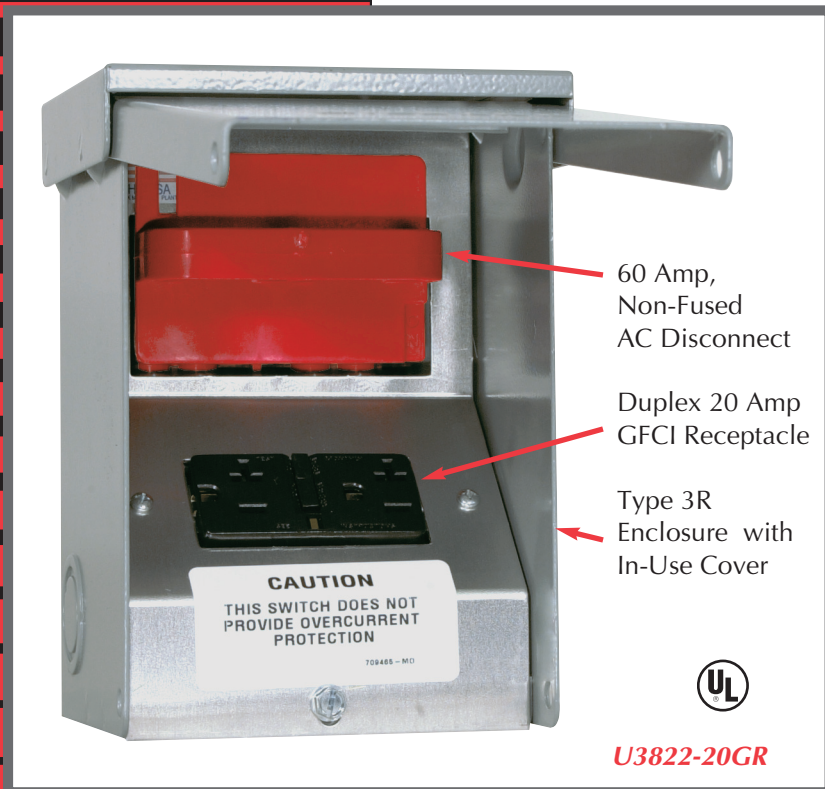

U3822-20GR

AMP	TYPE	CATALOG NUMBER	MAX H.P.	WT. @ #	AC DISCONNECT WIRE RANGE		GROUND CONNECTOR WIRE RANGE	DIMENSIONS			WIRE RATING	
					CU	AL	CU/AL	D"	W"	H"	CU °C	AL °C
60	NONFUSIBLE	U3822-20GR	10	6	#14-#2 AWG	#12-#2 AWG	#14-#4 AWG	4.8	5.25	7.4	60°/75°	60°/75°

To ensure the safest conditions, Milbank disconnect pullers are designed to be reversible so they may be reinstalled in the OFF position.

All units are designed with a padlock provision on the cover for security.

****Note:** U3822-20GR cover rated as *IN USE COVER* (Cover may be used with cords plugged into receptacle).

*Reprinted with permission from NFPA 70-2002, *National Electrical Code*®, Copyright 2001, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the NFPA on the referenced subject, which is represented only by the standard in its entirety. *National Electrical Code*® and *NEC*® are registered trademarks of the National Fire Protection Association, Quincy, MA.

816.483.5314 phone



816.483.6357 fax

www.milbankmfg.com

GFCI-ACD 10/07 (7.5K)

MILBANK®

60 Amp Non-Fusible Air Conditioner Disconnect Type 3R

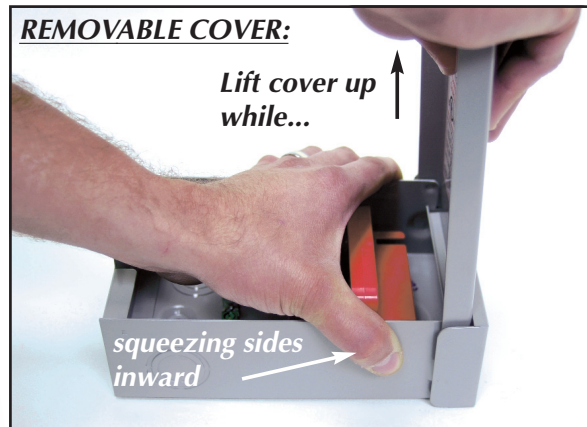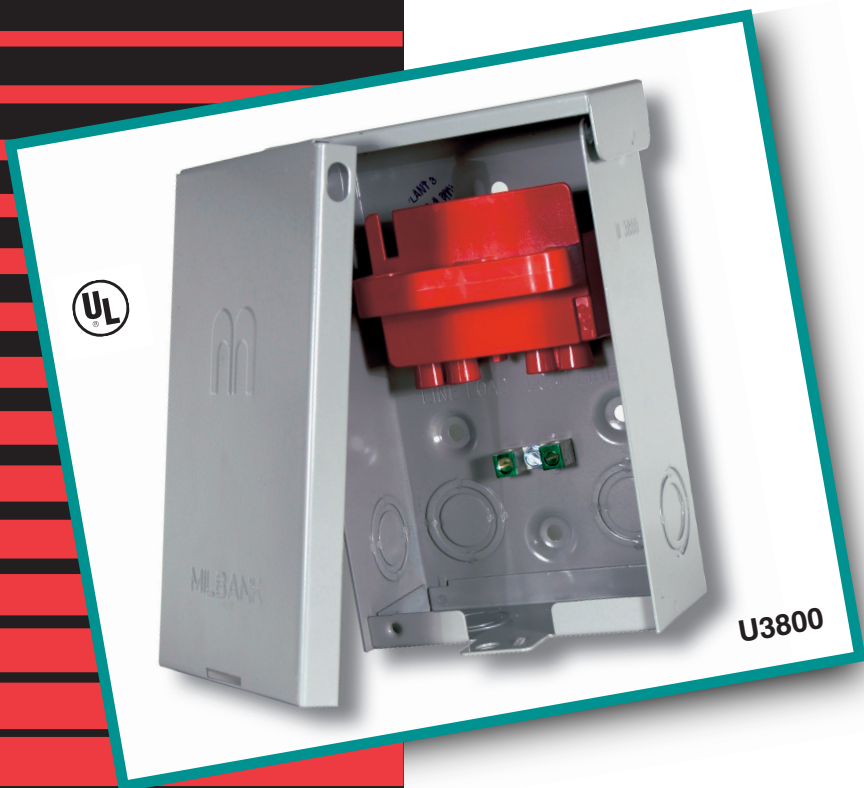

- *UL Listed Without Deadfront*
- *UL Listed as Enclosed Pullout Switch UL 1429*
- *UL Listed to Canadian Standards*
- *Line and Load Terminals Fully Enclosed*
- *Type 3R Rainproof Enclosure*
- *Duplex Ground Connector*
- *One-Inch Concentric Knockouts*
- *1Ø, 240 VAC*



Milbank's air conditioner/equipment disconnects have a compact design that meets NEC® wire bending space requirements, and complies with article 440-14 in the NEC® for Air Conditioning Equipment. To insure the safest conditions, Milbank disconnect pullers are designed to be reversible so they may be reinstalled in the OFF position.

All units are designed with a padlock provision on the cover for security.

TECHNICAL INFORMATION

AMP	TYPE	CATALOG NUMBER	MAX H.P.	WT. @ #	LINE & LOAD CONNECTOR WIRE RANGE		GROUND CONNECTOR WIRE RANGE	DIMENSIONS			WIRE RATING	
					CU	AL	CU/AL	D"	W"	H"	CU °C	AL °C
60	NONFUSIBLE	U3800	10	3.25	#14-#2 AWG	#12-#2 AWG	#14-#4 AWG	3	5	8	60°/75°	60°/75°

ALSO AVAILABLE

30	FUSIBLE	U3803	3	3.7	#14-#2 AWG	#12-#2 AWG	#12-#2 AWG	3	5	9-1/4	60°/75°	60°
60	FUSIBLE	U3806	10	3.7	#14-#2 AWG	#12-#2 AWG	#12-#2 AWG	3	5	9-1/4	60°/75°	60°

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

MILBANK®