


Milbank Meter Sockets

KCP&L / KC Area

RINGLESS METER SOCKETS

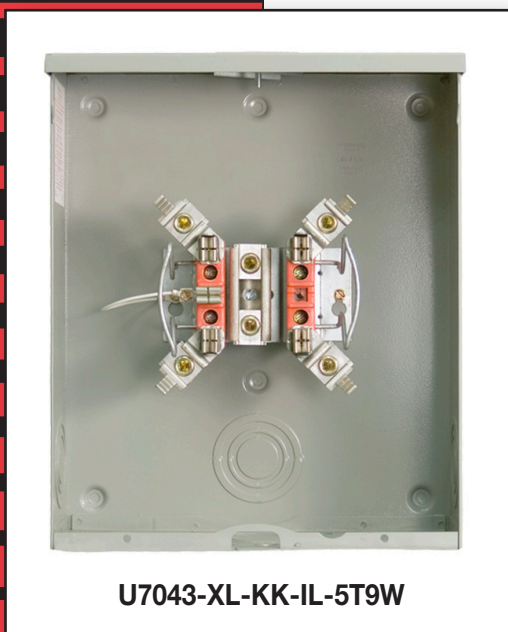

APPLICATION	KCP&L NUMBER
100 Amp – 1Ø – OH/UG	U7043-XL-KK-IL-5T9W
200 Amp – 1Ø – OH/UG	U7043-XL-KK-IL-5T9W
320 Amp – 1Ø – HDLB – OH/UG	U4702-X-5T9-K3-K2-IL ①
200 Amp – 7 Term – 3Ø – HDLB – OH/UG	U8107-XL-IL
2 Gang – 100/150 Amp – OH/UG	U1232-X-5T-K1
2 Gang – 200 Amp – OH/UG	U1252-X-5T-K1 ②
4 Gang – 100/150 Amp – OH/UG	U1232-X-5T-K3 ③
4 Gang – 200 Amp – UG (OH*)	U1254-X-5T-K3 ③
CONDOMINIUM SOCKETS WITH MAINS***	
2 Gang – 125 Amp / Position*** – Horn Bypass	U2852-X-KK-5T**** ②
2 Gang – 200 Amp / Position*** – Horn Bypass	U2862-X-KK-5T**** ③
4 Gang – 125 Amp / Position*** – Horn Bypass	U2854-X-KK-5T**** ④
4 Gang – 200 Amp / Position*** – Horn Bypass	U2864-X-KK-5T**** ②
6 Gang – 125 Amp / Position*** – Horn Bypass	U2856-X-KK-5T**** ④
6 Gang – 200 Amp / Position*** – Horn Bypass	U2866-X-KK-5T**** ⑤

HDLB = Heavy Duty Lever Bypass

* Extension kit K3923 required for OH use.

*** Breakers for Condo sockets

125A and less: Milbank - MQP, CH/West - QP/BR, Murry/CH - MP, GE - Qline, SQ-D Homeline, Siemens/ITE - QP

125–200A: CH/West - BR/BJ, Murry/CH - MD, GE - Qline

**** Use connector kits on line side only.

- ① Max. line side conductor size is (1) or (2) 250 kcmil
- ② Single 350 kcmil max. line side connector only
- ③ Single or twin 350 kcmil line side connector only
- ④ Twin 350 kcmil line side connectors only
- ⑤ Twin 600 kcmil line side connectors only

ACCESSORIES

Closing Plates	Suffix	Catalog #	Connectors	Suffix	Catalog #
Sml. Closing Plate	-XL	A7551	350 kcmil	1Ø	(3 per set)
Lg. Closing Plate	-X	A9064	Single Lug Kit	-K1	K1539
Adapter Plate	-RRL	S8324	Twin Lug Kit	-K2	K1350
Hubs for Standard "RL" Opening			600 kcmil	1Ø	(3 per set)
1" Hub	-WL	A7514	Single Lug Kit	-K3	K1540
1¼" Hub	-YL	A7515	Twin Lug Kit	-K4	K1541
1½" Hub	-ZL	A7516	Fifth Terminals		
2" Hub	-DL	A7517	Fifth Terminal	Square Hole	K5T
2½" Hub	-EL	A7518	Fifth Terminal	Round Hole	5T8K2
Hubs for Large "R" Opening			Closing plate – A7551 for UG feed on all sockets with "RL"		
3" Hub	-F	A8110	Adapter plate S8324 for sockets with "X" or "R" and hub smaller than 3"		
3½" Hub	-G	A8111			
4" Hub	-H	A8112			

Phone: 816.483.5314

Fax: 816.483.6357

www.milbankmfg.com

KCPL 11/10

