

U3000-O-2/K3L-BL



U3000-O-2/K3L-BL features:

- 320 amp continuous, 400 amp maximum
- 4 terminal, 1Ø3W
- Heavy duty lever bypass, jaw clamping
- Underground service
- Milbank reliability
- Barrel lock knockout on cover
- PECO Energy approved

PECO
APPROVED

NEW:

- **ANTI-ROTATION LUGS INCLUDED** – anti-rotation bar on lugs allows the installer to torque down on the conductor without the lug rotating – **EASIER, FASTER, SAFER, MORE RELIABLE INSTALLATION**
- **FACTORY INSTALLED LUGS** – line side & load side – accommodate #4 - 600 kcmil or two 1/0 - 250 kcmil conductors, installed on the bus with proper torque values by the factory
- **Saves on field installation time with lugs already installed... no more, "I FORGOT THE CONNECTORS" at the jobsite.**
- **MORE WIRING ROOM...easier to wire with various sizes of conductors**

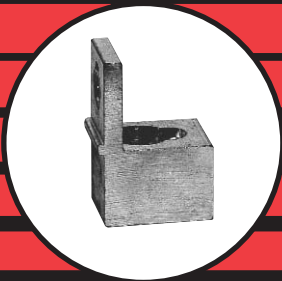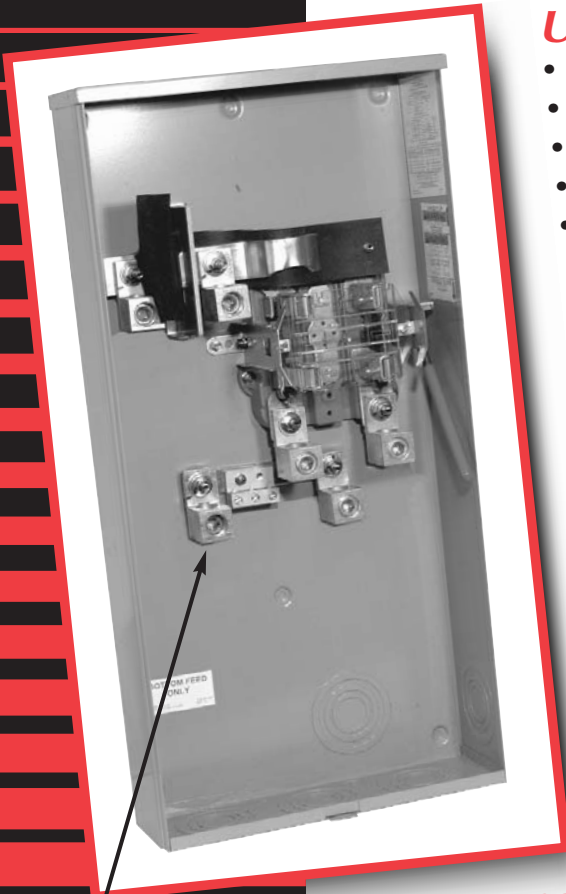


320 AMP CONTINUOUS-4 TERMINAL-RINGLESS-1Ø3W-600 VAC


SERVICE	CATALOG NUMBER	CONNECTORS CU/AL (LINE & LOAD)	BY- PASS	DIMENSIONS			5T KIT
				D"	W"	H"	
UG	U3000-O-2/K3L-BL	#4 - 600 kcmil or (2) 1/0 - 250 kcmil	LEVER	4 ⁷ / ₈	15	30	K3865

BYPASS: On the U3000 the lever supplies clamping action and also operates bypass device.

CONNECTORS: Factory installed #4 - 600 kcmil line side and load side.

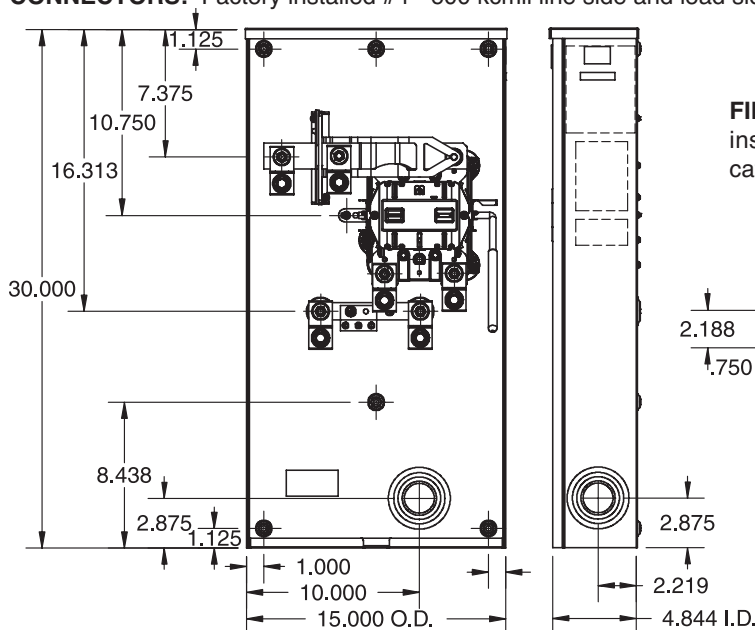

FIFTH TERMINAL: For field installed fifth terminal, order catalog # K3865.

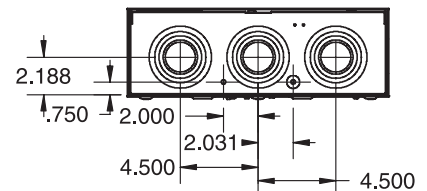

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

3000 06/04



MILBANK