


Milbank Meter Sockets



320 amp Meter Breaker Combinations

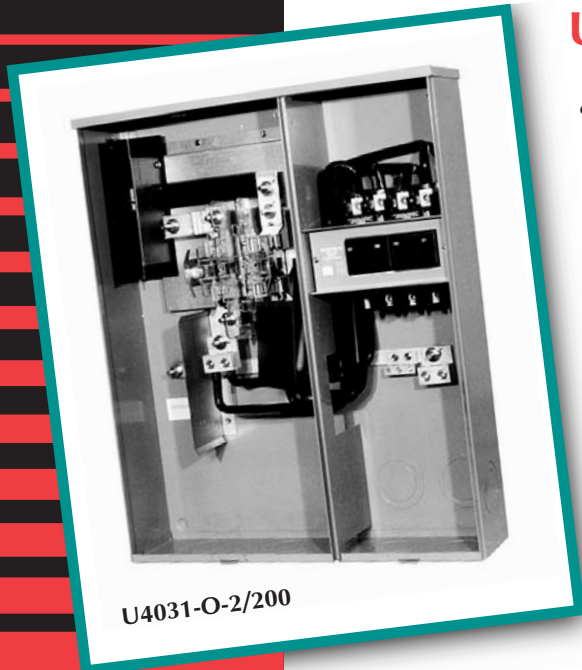

U4031-O-2/200

U4031-O-2/200

- 320 amp continuous
- 4 terminal
- Ringless design
- Line side studs for connector lug kits
- Load side connectors – Breaker 1/0-300 kcmil
- Jaw clamping, heavy duty lever bypass
- Underground service use only
- Factory equipped with (2) 200 amp 22K AIC rated breakers

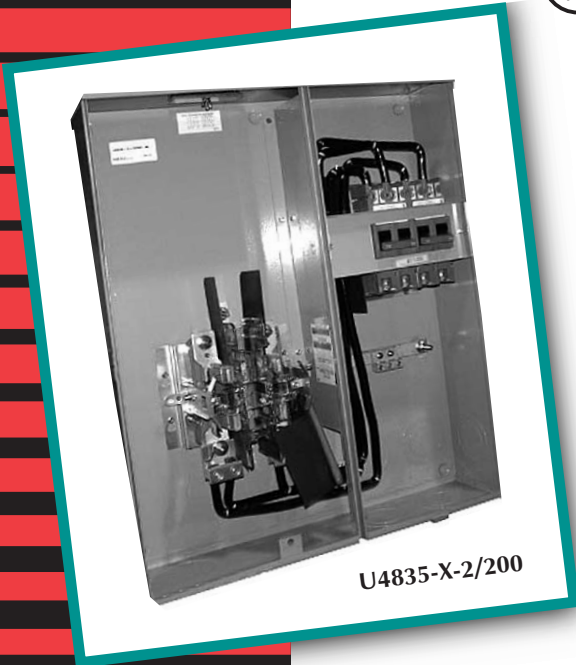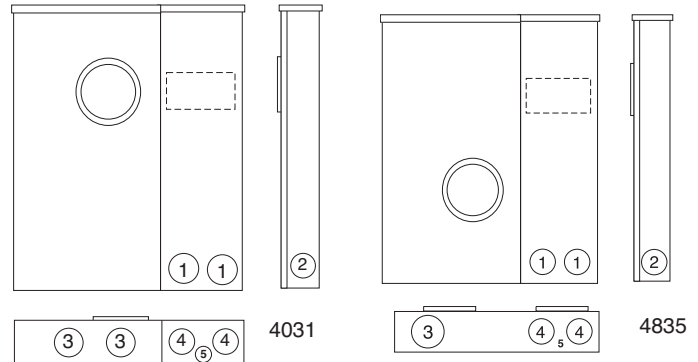

U4835-X-2/200

U4835-X-2/200

- 320 amp continuous
- 4 terminal
- Ringless design
- Line side studs for connector lug kits
- Load side connectors – Breaker 1/0-300 kcmil
- Jaw clamping, heavy duty lever bypass
- Overhead / underground service
- Factory equipped with (2) 200 amp 22K AIC rated breakers

320 AMP-4 TERMINAL-METER MAIN WITH BREAKERS-1Ø3W-RINGLESS-120/240 VAC

CATALOG NUMBER	SERVICE	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
			LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
U4031-O-2/200	UG	BLANK	3/8" X 16 STUDS	1/0-300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2	-
U4835-X-2/200-BL	OH/UG	C.P.	3/8" X 16 STUDS	1/0-300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2	-

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

320 MBC 12/04

MILBANK

