


320 Amp Ringless Meter Main

U5759-X-2/200



U5759-X-2/200

- 320 amp continuous / 400 amp maximum rating
- Twin 200 amp Milbank UQFP main breakers
- Heavy duty jaw-clamping meter socket **without bypass**
- Side wireway for easy overhead or underground installation
- Factory-installed anti-rotation lugs for easier, faster, safer, more reliable installation
- 4 terminal, 1Ø3W

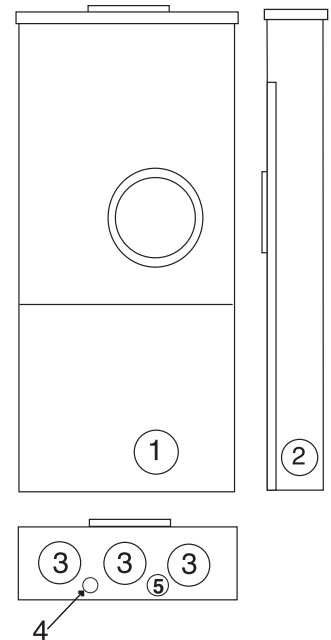

320 AMP METER MAIN WITH BREAKERS – 1Ø3W – RINGLESS – 600 VAC

CATALOG NUMBER	SERVICE	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S				
			LINE	LOAD		D"	W"	H"	1	2	3	4	5
U5759-X-2/200	OH/UG	C.P.	#4-600 kcmil or twin 1/0-250 kcmil	#6-300 kcmil	NONE	4 ⁷ / ₈	15	42	3	3	3	1/4	1/4, 1/2

BYPASS: Lever supplies clamping action on meter spades only. Socket has no bypass device.

LINE SIDE CONNECTORS: Factory installed anti-rotation connectors accommodate #4-600 kcmil single or twin 1/0-250 kcmil conductors.

FIFTH TERMINAL: For field installed fifth terminal, order separately catalog number **K3866**. Available with factory-installed fifth terminal — add suffix **-5T6** for 6:00 position or **-5T9** for 9:00 position.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

5759 08/05

