


Milbank Meter Sockets

Louisiana & Mississippi Utilities

LOUISIANA & MISSISSIPPI AREA

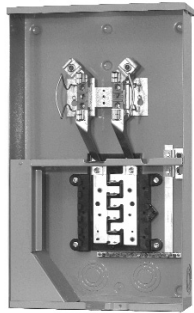

UAP5024-XL




U7040-RL-TG



U4702-X



U5168-XL-200

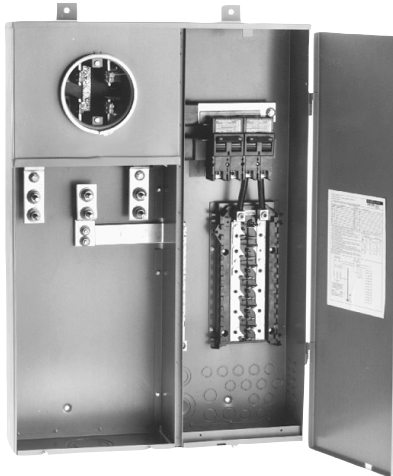

M400-UG-APS-LC

DESCRIPTION	SERVICE FEED	CATALOG NO.
125 Amp-4 Terminal		
125A4T	OH/UG	U8435-RL-TG
200 Amp-4 Terminal		
200A4T	OH/UG	U5792-XL-SOCOM
200A4T	OH/UG	U7040-RL-TG
200A4T	SWY.....UG	U1980-0
200 Amp-4 Terminal-House Power		
200A4T	OH/UG	UAP5024-XL
200 Amp-7 Terminal		
200A7T	OH/UG	U4701-RL-QG
320 Amp-4 & 7 Terminal		
320A4T	HDOH/UG	U4702-X
320A7T	HDOH/UG	U2594-X
200 Amp-4 Terminal-Meter Main- 8/16 & 20/40 Load Center		
200A4T	8/16OH/UG	U5168-XL-200
200A4T	20/40OH/UG	U5268-XL-200
400 Amp-4 Terminal-Ring Type-120/240 VAC-Split Main with Load Center		
400A4T	UG	M400-UG-APS-LC ^①

① **Breakers:** Two 200 amp 2-pole main breakers are factory installed. Semi-flush flange kit is packed inside meter section. Universal copper 24/40 circuit interior accepts Challenger, GE, Murray, Siemens/ITE and Cutler-Hammer/Westinghouse universal plug-in branch circuit breakers.



ACCESSORIES

Closing Plates	Suffix	Catalog #	Connectors	Suffix	Catalog #
Sml. Closing Plate	-XL	A7551	350 Kcmil	1Ø	(3 per set)
Lrg. Closing Plate	-X	A9064	Single Lug Kit	-K1	K1539
Adapter Plate	-RRL	S8324	Twin Lug Kit	-K2	K1350
Hubs for Standard "RL" Opening			600 Kcmil	1Ø	(3 per set)
1" Hub	-WL	A7514	Single Lug Kit	-K3	K1540
1 ¼" Hub	-YL	A7515	Twin Lug Kit	-K4	K1541
1 ½" Hub	-ZL	A7516	350 Kcmil	3Ø	(4 per set)
2" Hub	-DL	A7517	Single Lug Kit	-K5	K3082
2 ½" Hub	-EL	A7518	Twin Lug Kit	-K6	K3442
Hubs for Large "R" Opening			600 Kcmil	3Ø	(4 per set)
3" Hub	-F	A8110	Single Lug Kit	-K7	K3441
3 ½" Hub	-G	A8111	Twin Lug Kit	-K8	K3083
4" Hub	-H	A8112	Fifth Terminals		
			Fifth Terminal	Square Hole	K5T
			Fifth Terminal	Round Hole	5T8K2

LEGEND

OH	Overhead
UG	Underground
HD	Heavy Duty Lever Bypass
SWY	Side Wireway
T	Terminal
U	UL
UAP	U/L Listed Aluminum Painted

MILBANK[®]

www.milbankmfg.com


LA MS 11/07

60 Amp Non-Fusible

Air Conditioner Disconnect Type 3R




- UL Listed Without Deadfront
- UL Listed as Enclosed Pullout Switch UL 1429
- UL Listed to Canadian Standards
- Line and Load Terminals Fully Enclosed
- Type 3R Rainproof Enclosure
- Duplex Ground Connector
- One-Inch Concentric Knockouts
- 1Ø, 240 VAC

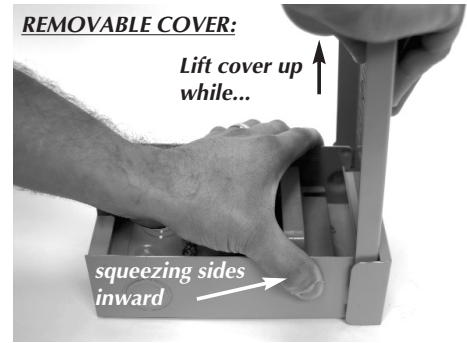

AMP	TYPE	CATALOG NUMBER	MAX H.P.	WT. @ #	LINE & LOAD CONNECTOR WIRE RANGE		GROUND CONNECTOR WIRE RANGE	DIMENSIONS			WIRE RATING	
					CU	AL	CU/AL	D"	W"	H"	CU °C	AL °C
60	NONFUSIBLE	U3800	10	3.25	#14-#2 AWG	#12-#2 AWG	#14-#4 AWG	3	5	8	60°/75°	60°/75°

Additional Milbank Products

In addition to your area utility's meter mounting equipment, Milbank also manufactures supporting products, such as...

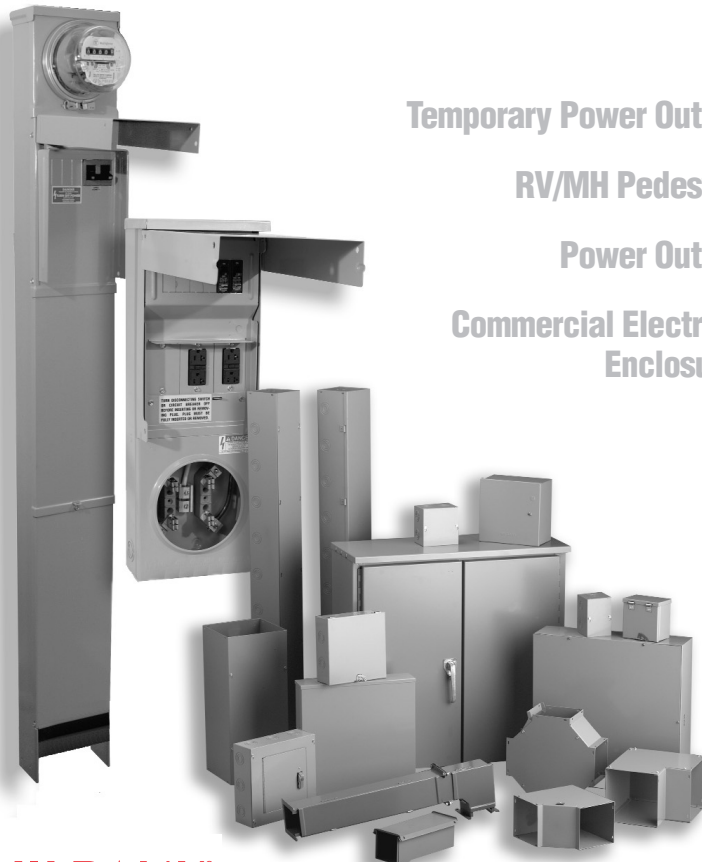

Temporary Power Outlets

RV/MH Pedestals

Power Outlets

Commercial Electrical Enclosures

Air Conditioner Disconnects

Hot Tub Disconnects

RV Power Outlets

Terminal Boxes

Temporary Power Outlets

Commercial Pedestals

Commercial Enclosures

CT Enclosures

Circuit Breakers

Distribution Unit Substations

Enclosed Circuit Breakers

Safety Switches

Test Switches