


Milbank Meter Main Combination

M400-APS-BS features:



- Overhead service with link bypass studs
- 400 amp max. (320 amp continuous), 120/240 volt, 22K AIC rated as meter main combination
- Ring type 4 terminal socket with MR-2 snap action sealing ring
- Split load capability (see breaker note below)
- UL Listed as service equipment – File E42827

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing this product.

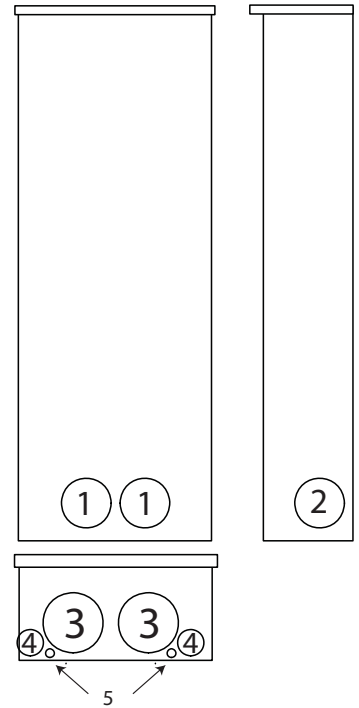

400AMP-OVERHEAD-LINK BYPASS

AMPS	SERVICE	CATALOG NUMBER	HUB	CONNECTORS		DIMENSIONS			CONCENTRIC K.O.'S				
				CU/AL	BY-PASS	D"	W"	H"	1	2	3	4	5
400	OH	M400-APS-BS	C.P.	STUDS	LINK	6 ¹ / ₈	11 ¹ / ₂	47 ¹ / ₈	2 ¹ / ₂	2 ¹ / ₂	3	1/2, 3/4	1/4

HUBS: One (1) 3" hub packed inside unit

BYPASS: Four (4) 12-24 studs with 1/2" hex nut on 1-1/2" centers

BREAKERS: One (1) **UQFBH-200** breaker included (200 amp, 22K). Order second breaker separately – type **UQFP** or **UQFPH**, depending on AIC requirements.



816-483-5314 phone

816-483-6357 fax

www.milbankmfg.com

