


Milbank Meter Sockets


PSE&G Territory

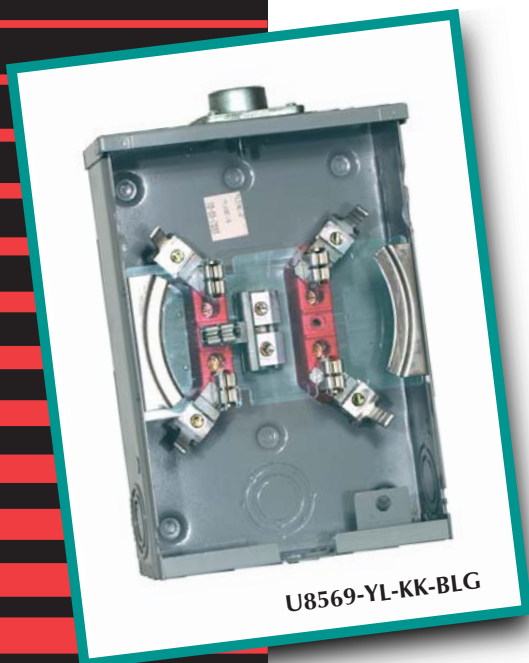

U8569-YL-KK-BLG

U8569-YL-KK-BLG

- 125 amp continuous
- 5 terminal
- Lexan® safety shield provided
- Ringless design
- 2/0 connectors
- Manual horn-type bypass provided
- 1 1/4" hub installed with one-way screws
- Barrel lock with guard provision

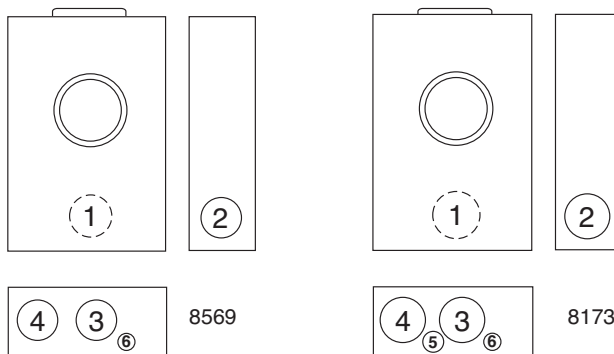

U8173-XL-KK-BLG

U8173-XL-KK-BLG

- 200 amp continuous
- 5 terminal
- Lexan® safety shield provided
- Ringless design
- 350 kcmil connectors
- Manual horn-type bypass provided
- Closing plate installed
- 2" hub with one-way screws packed inside
- Barrel lock with guard provision

| AMP | CATALOG NUMBER | SERVICE | HUB | CONNECTORS CU/AL | | BY-PASS | DIMENSIONS | | | CONCENTRIC K.O.'S | | | | | |
|-----|-----------------|---------|------|------------------|--------------|-----------|------------|----|--------|-------------------|-------|-------|-------|------------|-----|
| | | | | LINE | LOAD | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| 100 | U8569-YL-KK-BLG | OH/UG | C.P. | #6-2/0 | #6-2/0 | HORN TYPE | 3 5/16 | 8 | 11 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | 1 1/2 | - | 1/4 |
| 200 | U8173-XL-KK-BLG | OH/UG | C.P. | #6-350 kcmil | #6-350 kcmil | HORN TYPE | 4 1/8 | 11 | 15 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | 2 1/2 | 1 1/4, 1/2 | 1/4 |

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com


PSEG 07/05




Milbank Meter Sockets

PSE&G Territory

U1282-XL-KK-BLG & U1283-XL-KK-BLG

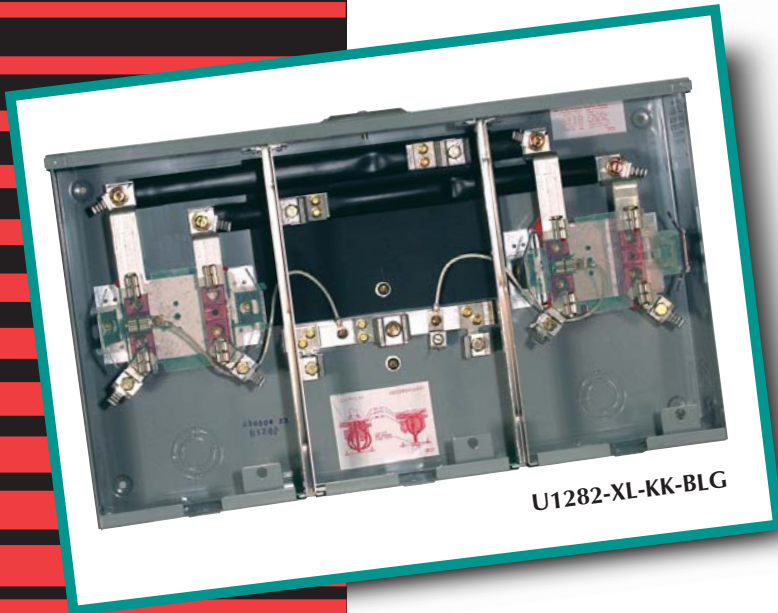

- 100 amp continuous per position
- 5 terminal
- Lexan® safety shields provided
- Ringless design
- Line side – 350 kcmil connectors
- Load side – 2/0 connectors
- Manual horn-type bypass provided
- Closing plate installed
- 2" hub with one-way screws packed inside
- Barrel lock with guard provision

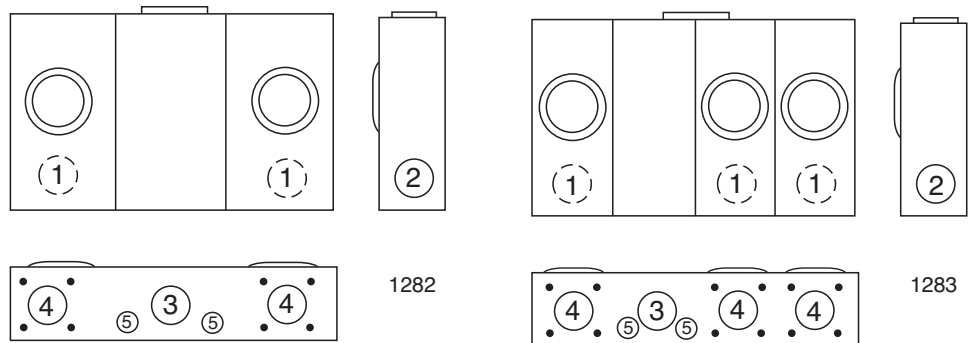

100 AMP-5 TERMINAL-HORIZONTAL GANG-CENTER WIREWAY OH/UG-RINGLESS-1Ø3W OR 3W NETWORK-300 VAC

| UTILITY | POS | CATALOG NUMBER | HUB | CONNECTORS CU/AL | | BY-PASS | DIMENSIONS | | | CONCENTRIC K.O.'S | | | | | |
|---------|-----|-----------------|------|---------------------|--------|-----------|------------|----------|----|-------------------|-------|-------|-------|----------|---|
| | | | | LINE | LOAD | | D" | W" | H" | 1 | 2 | 3 | 4 | 5 | 6 |
| PSE&G | 2 | U1282-XL-KK-BLG | C.P. | #2-350 kcmil | #6-2/0 | HORN TYPE | 4 1/2 | 24 1/2 | 14 | 1 1/2 | 1 1/2 | 2 1/2 | 2 1/2 | 1/4, 1/2 | - |
| PSE&G | 3 | U1283-XL-KK-BLG | C.P. | #2-350 kcmil | #6-2/0 | HORN TYPE | 4 1/2 | 32 11/16 | 14 | 1 1/2 | 1 1/2 | 2 1/2 | 2 1/2 | 1/4, 1/2 | - |

CONNECTORS: Extruded aluminum connectors are tin plated.

ENCLOSED BREAKERS: Enclosed breakers are available for field installed main breaker. Consult factory representative.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

