


Meter Mounting Equipment

Stainless Steel Products



USS4701-0

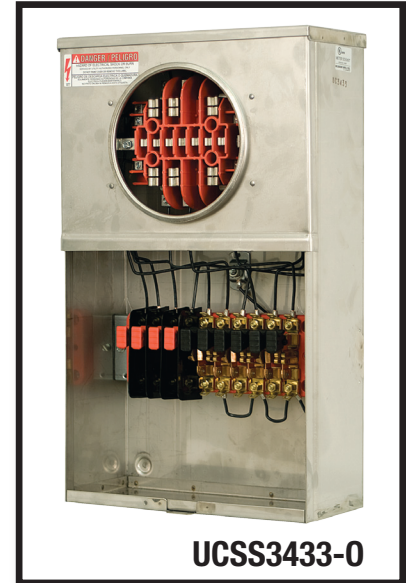

UCSS3433-0

Shown as UCSS3433-0-141 pre-wired unit

RINGLESS – 200A – SINGLE POSITION – 4, 5, & 7 TERMINAL

CATALOG NUMBER	SERVICE	HUB	# OF TERMS	CONNECTORS CU/AL		BYPASS	DIMENSIONS		
				LINE	LOAD		D"	W"	H"
USS3914-0	OH/UG	BLANK	4	#6-350 KCMIL	#6-350 KCMIL	NONE	4 $\frac{7}{8}$	13	19
USS4801-0	OH/UG	BLANK	4	#6-350 KCMIL	#6-350 KCMIL	LEVER	4 $\frac{7}{8}$	13	19
USS4801-0-5T9	OH/UG	BLANK	5	#6-350 KCMIL	#6-350 KCMIL	LEVER	4 $\frac{7}{8}$	13	19
USS4701-0	OH/UG	BLANK	7	#6-350 KCMIL	#6-350 KCMIL	LEVER	4 $\frac{7}{8}$	13	19

RING TYPE – WITH PROVISIONS FOR TEST SWITCH – TWO PIECE FRONT

CATALOG NUMBER	SERVICE	HUB	# OF TERMS	CONNECTORS CU	BYPASS*	DIMENSIONS		
						D"	W"	H"
UCSS3436-0	OH/UG	BLANK	6	#14 - #2	TEST SWITCH	5 $\frac{1}{8}$	12	20
UCSS3438-0	OH/UG	BLANK	8	#14 - #2	TEST SWITCH	5 $\frac{1}{8}$	12	20
UCSS3433-0	OH/UG	BLANK	13	#14 - #2	TEST SWITCH	5 $\frac{1}{8}$	12	20

FOR CONDUIT OPENING APPLICATIONS: All conduit openings have dimples provided to center location. Top conduit opening must have water-tight hub installed.

* Test switch provisions. Test switch not included.

Consult factory for other units available in stainless steel

Phone: 816.483.5314

Fax: 816.483.6357

www.milbankmfg.com

STAINLESS 2/11

