


# Milbank Load Centers

## U5971 Series | 200 Amp | 120/240 Volt



U5971-XL-200

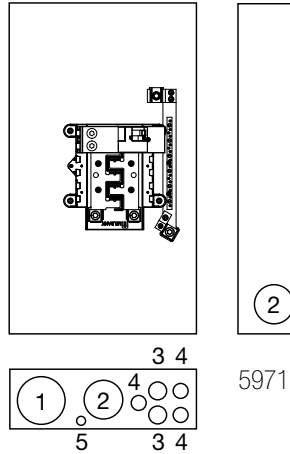

U5971-XL-200

### Specifications

- Available with 100A, 150A or 200A main breaker
- 120/240V 1PH applications
- UL listed
- Suitable for use as service equipment
- Copper interior with eight branch circuits
- #6 AWG – 350 kcmil feed-thru lugs
- Overhead or underground feed
- 10,000 AIC rated
- Removable covers
- Type 3R 16 gauge shell constructed of G90 galvanized steel
- Light gray polyester powder coat finish

### 200 Amp – Load Center with Main Breaker – 120/240V

Catalog Number	Main Breaker Amp	Service	Hub	Dimensions			Knockouts				
				D"	W"	H"	1	2	3	4	5
U5971-XL-100	100	OH/UG	C.P.	4½	14⅞	25⅙	3	2½	1	½,¾	¼,½
U5971-XL-150	150	OH/UG	C.P.	4½	14⅞	25⅙	3	2½	1	½,¾	¼,½
U5971-XL-200	200	OH/UG	C.P.	4½	14⅞	25⅙	3	2½	1	½,¾	¼,½

### Notes

- **Line Terminals:** As specified on circuit breaker (300 kcmil max).
- **Load Terminals:** As specified on circuit breakers (#1 AWG max).
- **Breaker Interlock:** Order **K5815** for 200A or 150A to 100A breakers (large frame to small frame). Order **K5820** for 200A or 150A to 200A or 150A breakers (large frame to large frame). Order **K5830** for 100A to 100A (small frame to small frame).

