


Milbank Meter Sockets

320 amp Meter Breaker Combinations


U4031-O-2/200

U4031-O-2/200-5T9

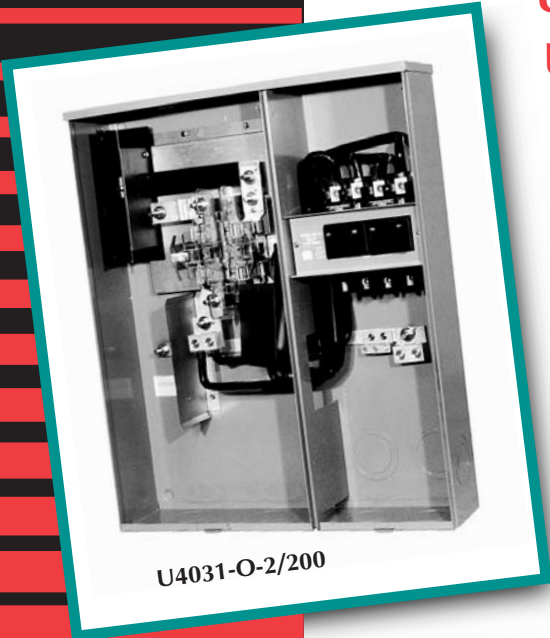

U4031-O-2/200

- 320 amp continuous rating
- 4 terminal or 5 terminal
- Ringless design
- Line side studs for connector lug kits
- Load side connectors – Breaker 1/0-300 kcmil
- Jaw clamping, heavy duty lever bypass
- Underground service use only
- Factory equipped with (2) 200 amp 22K AIC rated breakers
- Sockets with **-5T9** have factory installed 5th terminal
- Sockets with **-INV** have factory installed anti-inversion clip

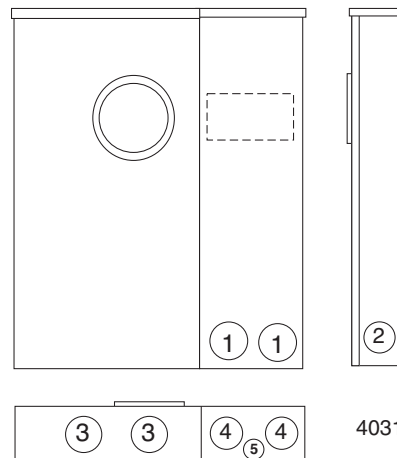

4031

320 AMP-4 OR 5 TERMINAL – METER MAIN WITH BREAKERS – 1Ø3W – RINGLESS – 120/240 VAC

CATALOG NUMBER	SERVICE	HUB	TERM	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S				
				LINE	LOAD		D"	W"	H"	1	2	3	4	5
U4031-O-2/200	UG	BLANK	4	3/8" X 16 STUDS	1/0- 300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2
U4031-O-2/200-5T9	UG	BLANK	5	3/8" X 16 STUDS	1/0- 300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2
U4031-O-2/200-5T9-INV	UG	BLANK	5	3/8" X 16 STUDS	1/0- 300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

320 MBC 08/05R



