

# 60 Amp Non-Fusible Air Conditioner Disconnect Type 3R



- *UL Listed Without Deadfront*
- *UL Listed as Enclosed Pullout Switch UL 1429*
- *UL Listed to Canadian Standards*
- *Line and Load Terminals Fully Enclosed*
- *Type 3R Rainproof Enclosure*
- *Duplex Ground Connector*
- *One-Inch Concentric Knockouts*
- *1Ø, 240 VAC*



Milbank's air conditioner/equipment disconnects have a compact design that meets NEC® wire bending space requirements, and complies with article 440-14 in the NEC® for Air Conditioning Equipment. To insure the safest conditions, Milbank disconnect pullers are designed to be reversible so they may be reinstalled in the OFF position.


All units are designed with a padlock provision on the cover for security.

## TECHNICAL INFORMATION

AMP	TYPE	CATALOG NUMBER	MAX H.P.	WT. @ #	LINE & LOAD CONNECTOR WIRE RANGE		GROUND CONNECTOR WIRE RANGE	DIMENSIONS			WIRE RATING	
					CU	AL	CU/AL	D"	W"	H"	CU °C	AL °C
60	NONFUSIBLE	U3800	10	3.25	#14-#2 AWG	#12-#2 AWG	#14-#3 AWG	3	5	8	60°/75°	60°/75°

## ALSO AVAILABLE

30	FUSIBLE	U3830	3	2.7	#14-#3 AWG	#14-#3 AWG	#14-#3 AWG	2-1/2	5	7-1/2	60°/75°	60°
60	FUSIBLE	U3860	10	3.3	#14-#3 AWG	#14-#3 AWG	#14-#3 AWG	3	5-1/8	8-1/2	60°/75°	60°

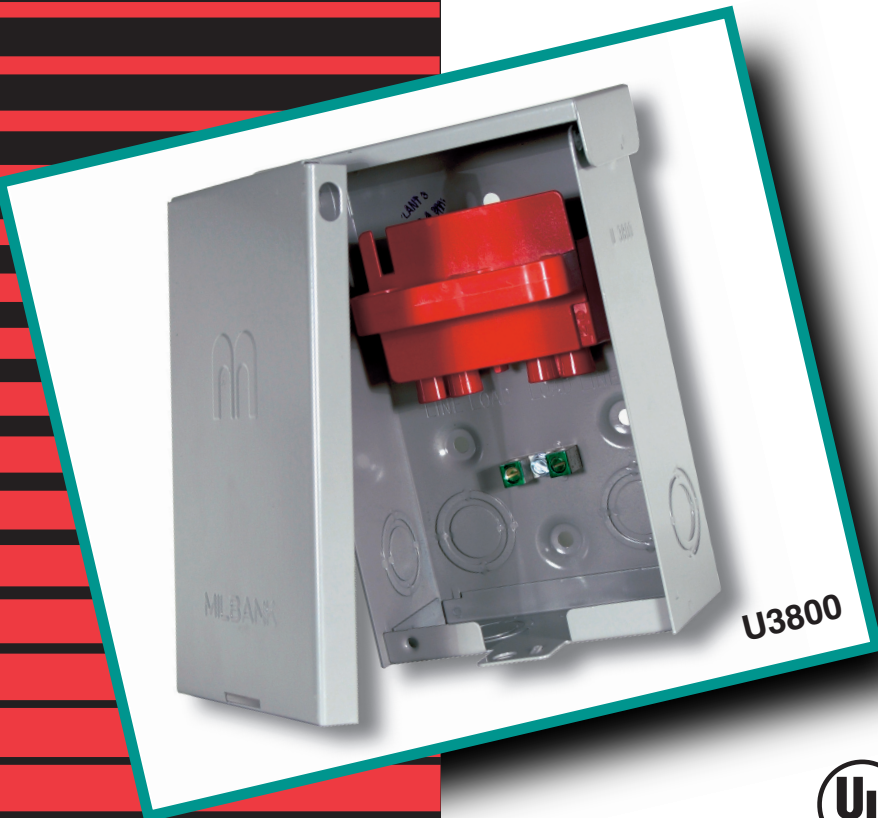

U3800



U3860

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

U3800 0709

**MILBANK®**