

# 200 amp Meter Main Combination




Available through  
**Haines Sales Corporation**

## **U3491-XL-200-KK-PL**

- 200 amp, 1Ø, 120/240 VAC meter main
- 4 Terminal ringless meter socket
- Horn type meter bypass provision (- KK)
- Brooks barrel lock knockout provision
- Overhead (OH) or underground (UG) service
- Service wire isolation for both OH and UG service
- Convenient knockouts and mounting embosses
- UL Listed



✓ **Local Inventory at Haines Sales**

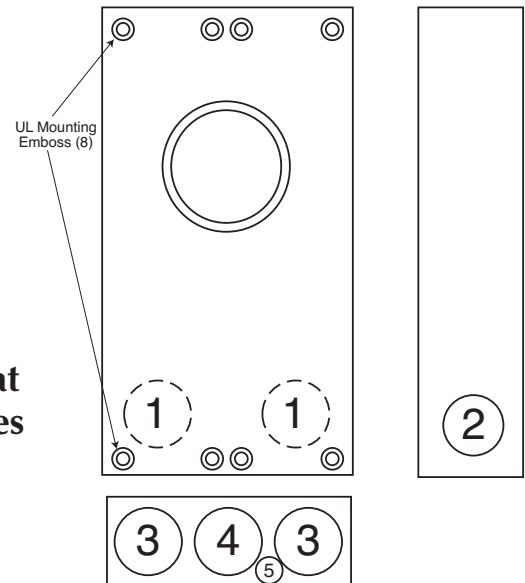

### 200 AMP-4 TERMINAL—METER MAIN WITH BREAKERS—1Ø3W—RINGLESS—120 / 240 VAC

CATALOG NUMBER	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S						
		LINE	LOAD		D"	W"	H"	1	2	3	4	5	6	
U3491-XL-200-KK-PL	C.P.	350 kcmil	300 kcmil	HORN	4 $\frac{1}{8}$	12	29	2 $\frac{1}{2}$	2	2 $\frac{1}{2}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{4}$	—

**BREAKER:** Milbank bolt-on type **UQFB-200-X1** (200 amp 120/240 10K AIC).

**HUBS:** Unit provided with **A7551** closing plate. Order hubs separately if required.

**FIFTH TERMINAL:** For 1Ø3W 208y/120 volt systems install **K5T** fifth terminal.

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

3491 01/07

