


Milbank Meter Sockets

320 amp Meter Breaker Combinations


U4031-O-2/200

U4031-O-2/200-5T9

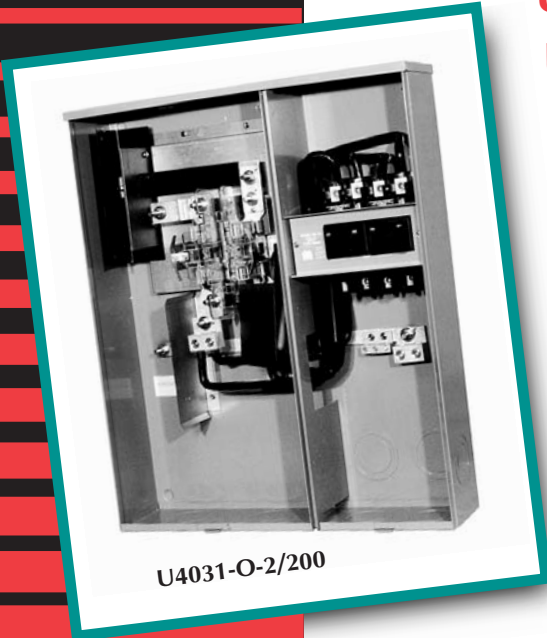

U4031-O-2/200

- 320 amp continuous rating
- 4 terminal or 5 terminal
- Ringless design
- Line side studs for connector lug kits
- Load side connectors – Breaker 1/0-300 kcmil
- Jaw clamping, heavy duty lever bypass
- Underground service use only
- Factory equipped with (2) 200 amp 22K AIC rated breakers
- Sockets with **-5T9** have factory installed 5th terminal
- Sockets with **-INV** have factory installed anti-inversion clip

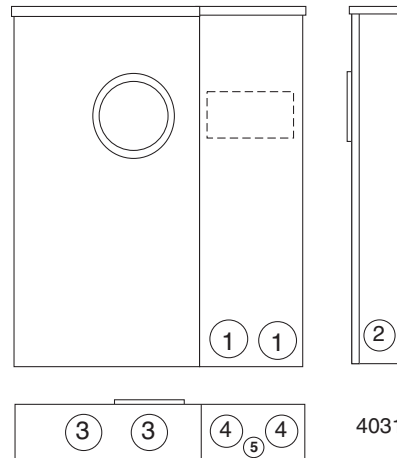

4031

320 AMP-4 OR 5 TERMINAL – METER MAIN WITH BREAKERS – 1Ø3W – RINGLESS – 120/240 VAC

CATALOG NUMBER	SERVICE	HUB	TERM	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S				
				LINE	LOAD		D"	W"	H"	1	2	3	4	5
U4031-O-2/200	UG	BLANK	4	3/8" X 16 STUDS	1/0- 300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2
U4031-O-2/200-5T9	UG	BLANK	5	3/8" X 16 STUDS	1/0- 300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2
U4031-O-2/200-5T9-INV	UG	BLANK	5	3/8" X 16 STUDS	1/0- 300 kcmil	LEVER	5 ³ / ₄	25	30	3	3	4	3	1/4, 1/2

816.483.5314 phone

816.483.6357 fax


www.milbankmfg.com

320 MBC 08/05R



Milbank Meter Sockets

320 amp Meter Breaker Combinations

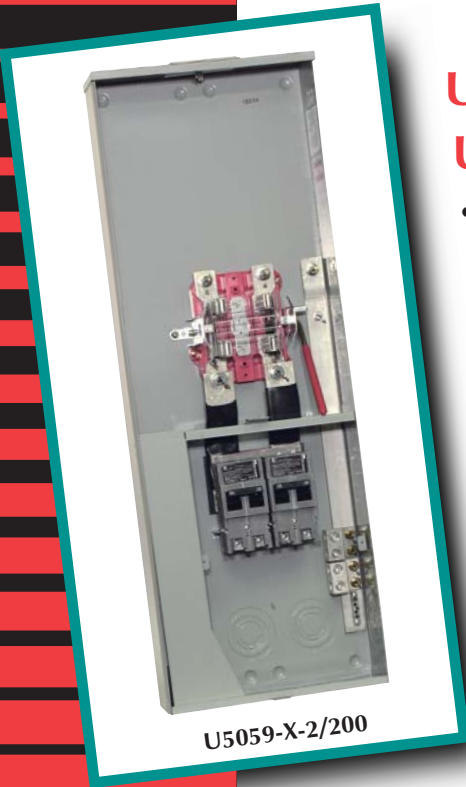


U5059-X-2/200

U5059-X-2/200

U5059-X-2/200-5T9

- 320 amp continuous rating
- 4 terminal or 5 terminal
- Ringless design
- Twin 200 amp Milbank UQFP 10k AIC main breakers
- Heavy duty lever bypass jaw-clamping meter socket
- Side wireway for easy overhead or underground installation
- Anti-rotation lugs are available on line side for easier, faster, safer & more reliable installation
- Rated up to 22k AIC
- Sockets with **-5T9** have factory installed 5th terminal
- Sockets with **-INV** have factory installed anti-inversion clip

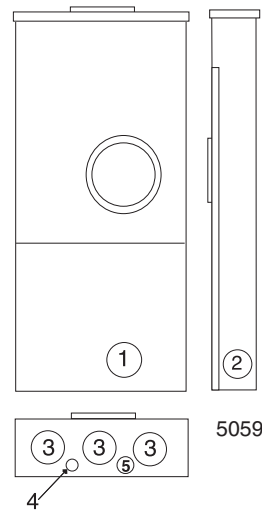

320 AMP-4 OR 5 TERMINAL - METER MAIN WITH BREAKERS - 1Ø3W - RINGLESS - 120/240 VAC

CATALOG NUMBER	SERVICE	HUB	TERM	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S				
				LINE	LOAD		D"	W"	H"	1	2	3	4	5
U5059-X-2/200	OH/UG	C.P.	4	3/8-16 STUD	#6-300 kcmil	LEVER	4 ⁷ / ₈	15	42	3	3	3	1/4	1/4 1/2
U5059-X-2/200-5T9	OH/UG	C.P.	5	3/8-16 STUD	#6-300 kcmil	LEVER	4 ⁷ / ₈	15	42	3	3	3	1/4	1/4 1/2
U5059-X-2/200-5T9-INV	OH/UG	C.P.	5	3/8-16 STUD	#6-300 kcmil	LEVER	4 ⁷ / ₈	15	42	3	3	3	1/4	1/4 1/2

816.483.5314 phone

816.483.6357 fax

www.milbankmfg.com

